

## Roof claddings

**Table 8.4.12.1: Catchment areas for profiled metal**


Paragraphs [8.1.7.2](#) and [8.4.12.1](#)

Penetration width (mm)	Maximum roof length above penetration Corrugated (m)	Maximum roof length above penetration Trapezoidal (m)	Maximum roof length above penetration Trough profile (m)
800 to 1200	4	8	16
600 to 799	6	12	18 <sup>(1)</sup>
400 to 599	8	16	18 <sup>(1)</sup>
0 to 399	12	18 <sup>(1)</sup>	18 <sup>(1)</sup>

**Note:** (1) Limited to 18 m as per the limitations of this acceptable solution.

**Figure 8.4.12.3A: Flashing for small pipes**

Paragraphs [8.4.12.3](#), [9.6.6.6](#), and [9.6.7.7](#)

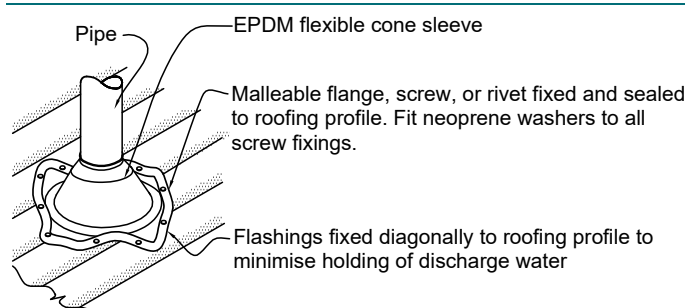


**Notes:** (1) The maximum *roof* pitch for this *flashing* is 45°. The minimum pitch is 10° if the base of the flange covers one or more complete troughs.

(2) This detail is suitable for pipes up to 85 mm in diameter.

**Figure 8.4.12.3B: Soaker flashing for pipe penetrations**

Paragraph [8.4.12.3](#) and [Table 4.5.1.1](#)

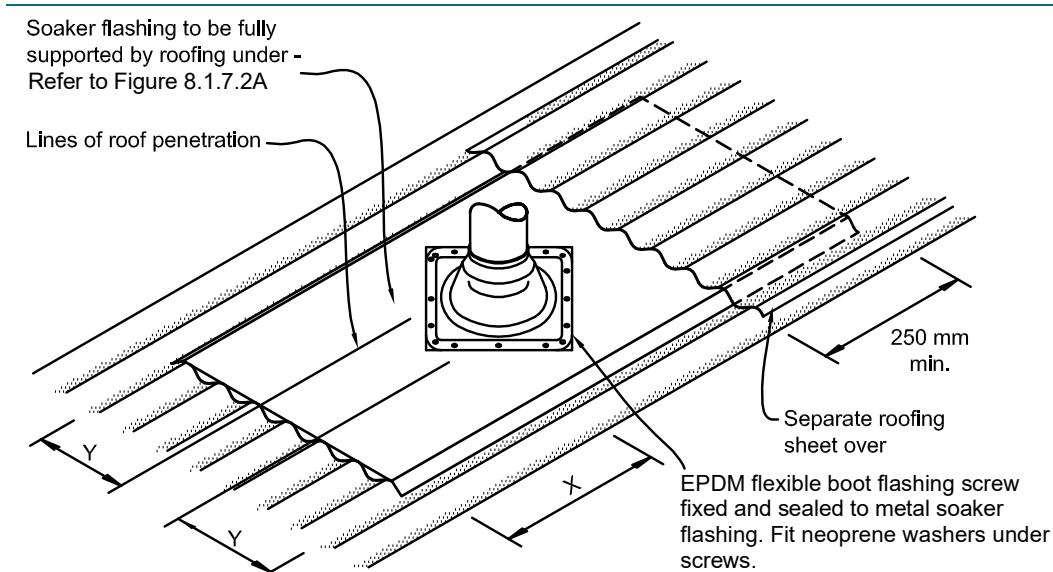

**Notes:** (1) This detail is suitable for pipes from 86 mm to 500 mm in diameter.

(2) This detail is suitable only for *roof* pitches of 10° or more.

(3) For dimensions X and Y, refer to [Table 4.5.1.1](#).